



MADHYA PRADESH ROAD DEVELOPMENT CORPORATION LTD.

(Govt. of M.P. under taking)

PWD Office Campus, in front of Navneet Tower Greater Kailash Road,
Old Palasia, Indore (M.P.) **Tale Fax** : +91-731-2495070

E-mail : divrdcind-mp@nic.in

No. /MPRDC/2010

Indore, Dated

WORK ORDER

To,

Shri Vaseem Ahmad Patel,
A-II Class Contractor,
119-Azad Road Sanawad
Distt. Khargone (M.P.)

**Sub : Tender for Reconstruction of C.D. at km. 7 on on Mhow-Mandleshwar
Road SH-01.**

P.A.C. Rs. 6.04 Lacks.

**Ref : 1. This Office Letter No. 895/MPRDC/2010 Indore Dated 27-07-2010.
2. Agreement No. 02/2010-11.**

--- 000 ---

Dear Sir,

Percentage rate tender submitted by you @ 15.00% (One Five Point Zero Zero Percentage) above S.O.R. of Road & Bridge work, issued by Engineer-in-Chief M.P. PWD, Bhopal in force from 15-04-2009 and amendment up to date, has been accepted by the this office on behalf of Governor of M.P.

You have also signed the agreement, hence commence the work and complete the same within stipulated period of 3 Month (Three Month) including rainy season from the date of issue of this work order please.

Encl.: 1 Schedule.

**Divisional Manager
MPRDC Ltd. Indore**

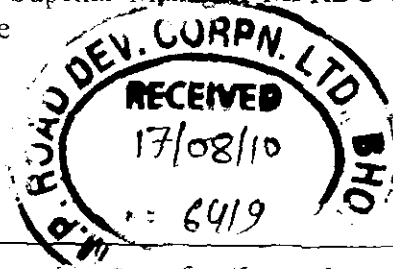
Endt. No. ... 986 /MPRDC/2010

Indore, Dated 12.08.2010

Copy to:-

1. The Chief Engineer, MPRDC, 16-A, Arera Hills Bhopal for information please.
2. The DGM (MIS) MPRDC, Bhopal for information. Please upload this work order in MPRDC website.
3. Shri B.C. Tentwal, AGM, MPRDC Indore for information & necessary action please
4. Shri Santosh Supekar Manager, MPRDC Indore for information & necessary action please

Encl.: 1 Schedule.




**Divisional Manager
MPRDC Ltd. Indore**

SCHEDULE OF ITEM FOR RECONSTRUCTION OF HUME PIPE CULVERT
Mhow- Mandleshwar Road SH-1
Double row 1200 mm dia 15 mtr wide


Rate as per S.O.R. (15-4-2009
Rs 603,830.00

S. No.	S.O.R. Item No.	Description	Quantity	Rate	Amount
1	2.3/P-15/R1	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead upto 1000 metres and as per relevant clauses of section-200 in <u>Rubble stone masonry in lime mortar</u>	25	126.00	3,150.00
	1.1A/P-42/B1	Earth work in excavation of foundation of structures as per drawing and technical specification, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and backfilling with approved material etc. and as per relevant clauses of section 300 & 2100 in I Ordinary soil (i) upto 3 m depth			
		Face Wall	43.20		
		Below Pipe	58.21		
		U/s apron	3.987		
		D/s apron	7.47788		
			<u>112.87</u>	94.00	10,610.00
		Cum.			
3	2.16/P-49/B 2	Providing P.C.C. M-10 Nominal mix for hume pipe culverts in foundation and sub structure etc. as per drawing and as per relevant clauses of section 1500, 1700, 2100 and 2900. Levelling course for face wall	4.39	2252.00	9,891.00
					Cum.
4	2.16/P-44/ B-2	Providing P.C.C. M-10 Nominal mix for hume pipe culverts in foundation and sub structure etc. as per drawing and as per relevant clauses of section 1500, 1700, 2100 and 2900. A - PCC Grade M10 Above bed face wall	45.37		
		Guard stone	0.32		
		Deduct for pipe	-5.44		
			<u>40.25</u>	2252.00	90,635.00
		Cum.			
	2.28/P-49/B 2	Providing concrete cradle bedding in M-15 grade concrete as per clause 2900 and as per section 1700 and 2900.	2.82	3117.00	8,790.00
					Cum.
6	2.21/P-49/B2	Providing first class bedding below hume pipes with granular material as per clause 2904 of specifications Below Pipe	12.91	616.00	7,954.00
					Cum.
7	2.18/P-49/B 2	Providing and Laying Reinforced cement concrete pipe NP4 /prestressed concrete pipe for culverts on first class bedding of granular material in double row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets and as per relevant clauses of section-2900. a) Double row 1200 mm dia	15.00	16224.00	243,360.00

S. No.	S.O.R. Item No.	Description	Quantity	Rate	Amount
8	4 1(a)/P55/B-4	Providing and laying boulders apron/toe wall on river bed for protection against scour with stone boulders weighing not less than 40 kg each complete as per drawing and Technical specification and as per relevant clauses of section 2500. Boulder laid dry without wire crates.	D/s apron U/s apron <u>8.60</u> Cum.	5.61 2.99 873.00	7,507.00
9	SOR - 4.4 (a)/P55/B-4	Providing and laying Pitching on slopes laid over prepared filter media including boulder apron laid dry in front of toe of embankment complete as per drawing and Technical specifications and as per relevant clauses of section 2500. a) Stone Boulder weighing not less than 40 Kgs. U/S D/S	5.575665 <u>5.575665</u> 11.15	873.00	9,735.00
10	sOR - 4.5(a)/P55/B-4	Providing and laying Filter material underneath pitching in slopes complete as per drawing and Technical specification and as per relevant clauses of section 2500. U/S D/S	1.858555 <u>1.858555</u> 3.72	908.50	3,377.00
11	3.10/P-19/R-3	Construction of embankment/subgrade with approved material/selected soil having CBR >5 (Unless specified otherwise in the contract) obtained from road side cutting excavation of drain and foundation of other structure i/c all lifts & leads upto 1000 M. i/c grading to required slope & camber and compacting using vibratory roller of 80 to 100 kN static weight to meet requirement of Table 300.1, 300.2 and as per relevant clause of section 300.	2479.72 -43.50 <u>2436.22</u> Cum.	54.00	131,556.00
12	4.1/P-21/R-4	Construction of granular sub-base by providing coarse graded material, spreading in uniform layers with on prepared surface, mixing by mix in place method at OMC, and compacting with vibratory roller to achieve the desired density, complete in all respect and as per relevant clauses of section-400. (i) for grading-I Material For formation	94.50 <u>58.50</u> 153.00 Cum.	505.00	77,265.00
					603,830.00


Manager
M.P.R.D.C. Ltd
Indore (M.P.)


Assistant General
Manager
M.P.R.D.C. Ltd


Divisional Manager
M.P.R.D.C. Ltd
Indore (M.P.)